

 **disty**

Versatile applications
in medicine,
business and
industry

disty **Notruf**^{pro}

The life guard on the arm.




- **DECT-/GAP- telephone accessory**
- **Alarmserver suitable**
- **With acceleration sensor**

www.disty.de

distyNotruf^{pro}

The life guard on the arm.

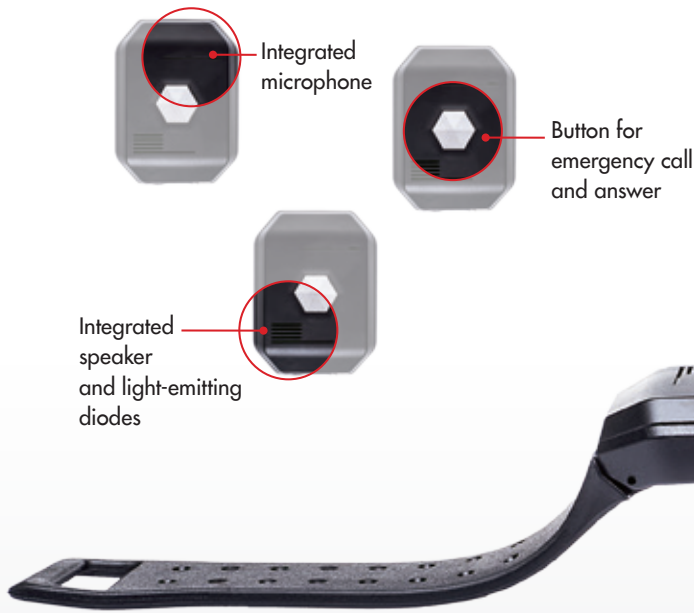

The distyNotruf^{pro} reports emergencies by acceleration sensor or keystroke (DECT/GAP) for a faster and more efficient communication in exigencies.

- Safe communication in case of alarm
- Quick and efficient assistance at the push of the button
- DECT technology ensures communication at any time between transmitters and up to 5 receivers

distyNotruf^{pro} – The direct connection to the alarm server* or to a central location by keystroke

Scope of delivery

- distyNotruf^{pro} with bracelet
- User brief instruction
- Belt clip
- Collar
- Charging cable and power supply

Optionally available

- distyProgrammieradapter
- The first call number can be saved using the clip function. The distyProgrammieradapter is required to store additional numbers. With the aid of the distyProgrammer app, which is available on the website www.disty.de, the possible four remaining call numbers can be stored.

Technical Details

- DECT-GAP, EN 300 444
- Compatible with all consumer DECT/GAP base stations
- Compatible with all professional DECT systems
- Compatible with FRITZ!Box and Speedport Neo
- Speaker | Microphone
- Acceleration sensor
- Alarm server suitable – supports a variety of protocols used by manufacturers of alarm servers, including Ascum, NewVoice, TeMeNo, Novalink
- Running Time: > 120 Std | Talk Time: > 4 Std.
- Interface for charging and programming
- LED power indicator (in two colours)
- Button for distress calls and operation
- Lithium-Ion battery, capacity: 450 mAh
- Operating ambient temperature: -10 °C to 40 °C
- Storage temperature: -10 °C to 60 °C
- Plastic enclosure: 56 x 42 x 14 mm
- Protection class IP65
- Weight: approx. 29 g

*Supports a variety of protocols used by manufacturers of alarm servers, incl. Ascum, NewVoice, TeMeNo, Novalink



Mat.-No.: 5000347, EAN 4260047840274
All rights to changes reserved.

Servicehotline

+49 (0)431 · 3 64 58 22



disty communications GmbH

Holzoppelweg 14 · D-24118 Kiel

Phone +49 (0)431 · 3 64 58 01

www.disty.de